



VeryOne®

Lubricity Improvers

A EURENCO Company

VeryOne® Lubricity Improver VO-LI-201



www.veryone.com

VeryOne® Lubricity Improver (VO-LI-201)

APPLICATIONS


VO-LI-201 is a Lubricity Improver additive used to reach regulated lubricity specifications of low and ultra-low sulphur diesels such as EN590 and ASTM D975.

VO-LI-201 is an acid type Lubricity Improver and is compatible with other additives.

TYPICAL PROPERTIES

Appearance:	Light yellow liquid
Relative Density:	0.904
Specific Gravity:	7.54 lbs/gal
Flash Point:	>140°C (284 °F) (Pensky-Martens)
Kinetic Viscosity (@20°C):	20 mm ² /s (20 cSt)
Sulphur content ppm:	<15 ppm
Pour Point:	<-10 °C (14 °F)

TREATMENT RATE

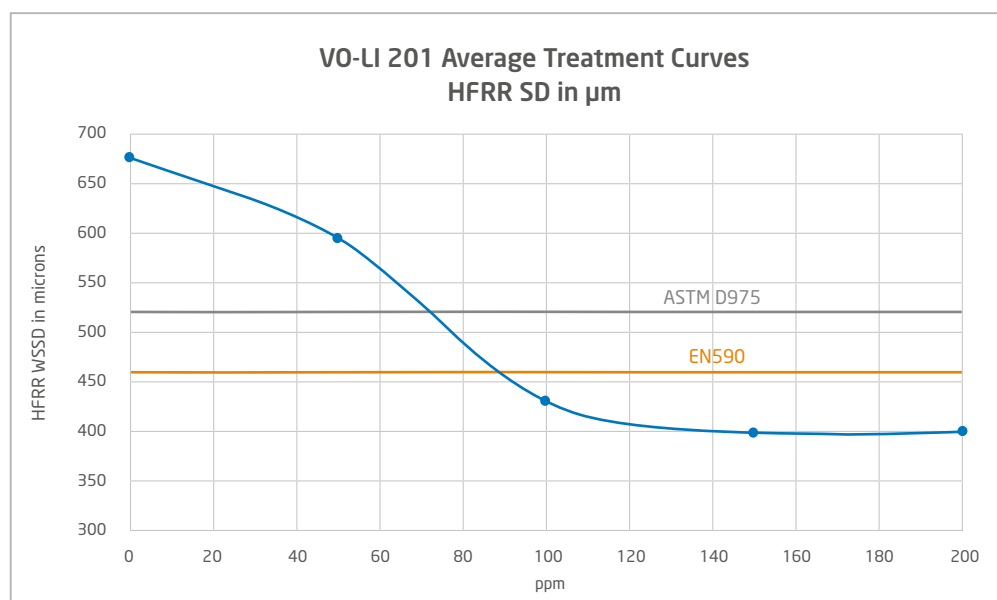

The recommended dosage for VO-LI-201 is 25 to 100 wt. ppm depending on the target and diesel to treat.

HANDLING AND STORAGE

Before handling, storage, or use, please refer to the Safety Data Sheet for detailed information.

The storage of **VO-LI-201** is optimum at room temperature around 20°C (68 °F) but can typically be stored at lower temperatures during winter.

Typical shelf life of **VO-LI-201** is 24 months when storage guidelines provided in the SDS are followed.