



**VeryOne®**

*Lubricity Improvers*

A EURENCO Company

# VeryOne® Lubricity Improver VO-LI-202



[www.veryone.com](http://www.veryone.com)

# VeryOne® Lubricity Improver (VO-LI-202)

## APPLICATIONS


**VO-LI-202** is a Lubricity Improver used to reach regulated specifications of low and ultra-low sulphur diesels such as EN590 and ASTM D975.

**VO-LI-202** responds to the demand for neutral Lubricity Improvers.

## TYPICAL PROPERTIES

Appearance:	Light yellow liquid
Relative Density:	0.925
Specific Gravity:	7.75 lbs/gal
Flash Point:	62°C (142.6 °F) (Pensky-Martens)
Kinetic Viscosity (@20°C):	12.2 mm²/s (12.2 cSt)
Sulphur content ppm:	<15 ppm

## TREATMENT RATE

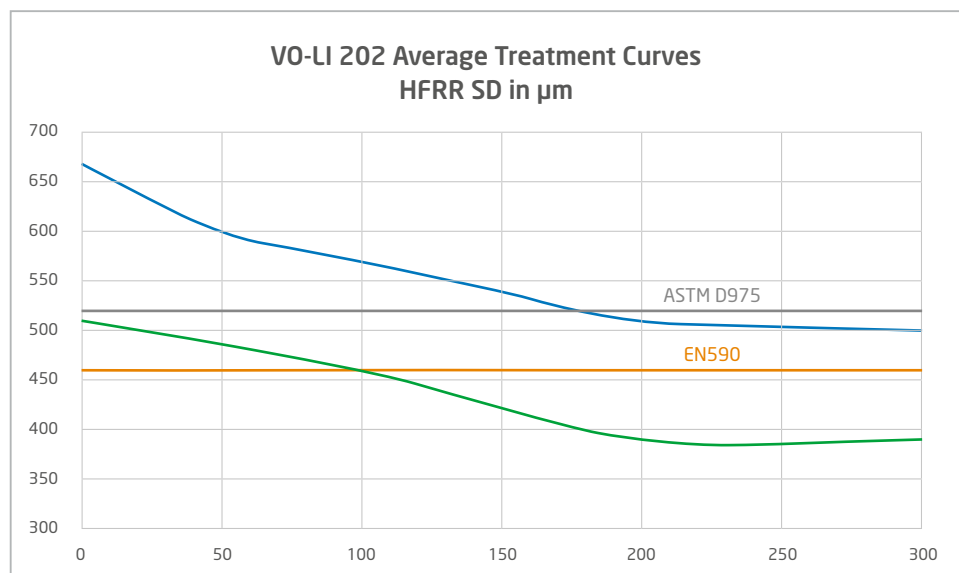

The recommended dosage for **VO-LI-202** is 50 to 200 wt. ppm depending on the target and diesel to treat.

## HANDLING AND STORAGE

Before handling, storage, or use, please refer to Safety Data Sheet for detailed information.

**VO-LI-202** contains organic solvents. It is optimum at room temperature around 20°C (68 °F).

**VO-LI-202** typical shelf life is 12 months when storage guidelines of the SDS are followed.

Exposure to freezing temperatures may cause a reversible turbidity, it does not alter the capability of the product.