



**VeryOne<sup>®</sup>**

*Lubricity Improvers*

A EURENCO Company

# VeryOne<sup>®</sup> Lubricity Improver VO-LI-301



[www.veryone.com](http://www.veryone.com)

# VeryOne® Lubricity Improver (VO-LI-301)

## APPLICATIONS


**VO-LI-301** is a specially designed solution for Diesel fuels lubricity improvement, particularly of low and ultra-low Diesel fuels. Low treatment rate restores fuel lubricity down to specifications (e.g. EN 590 or ASTM D975, respectively max. 460 µm and max. 520 µm wear scare diameter by HFRR) and therefore improving equipment and engine durability.

**VO-LI-301** is based upon the mono-acid technology, is fully compatible with other fuel additives and meets no harm requirements.

## TYPICAL PROPERTIES

<b>Appearance:</b>	Clear, light yellow liquid	Visual
<b>Relative Density:</b>	ca. 0.89 (@ 20 °C/68 °F)	ASTM D4052
<b>Flash Point:</b>	> 100 °C (212 °F)	ASTM D93
<b>Kinetic Viscosity:</b>	20-50 mm <sup>2</sup> .s <sup>-1</sup>	ASTM D445
<b>Sulphur content:</b>	<15 ppm	ASTM D5453
<b>Pour Point:</b>	≤ 8 °C (47 °F)	ASTM D97

## TREATMENT RATE

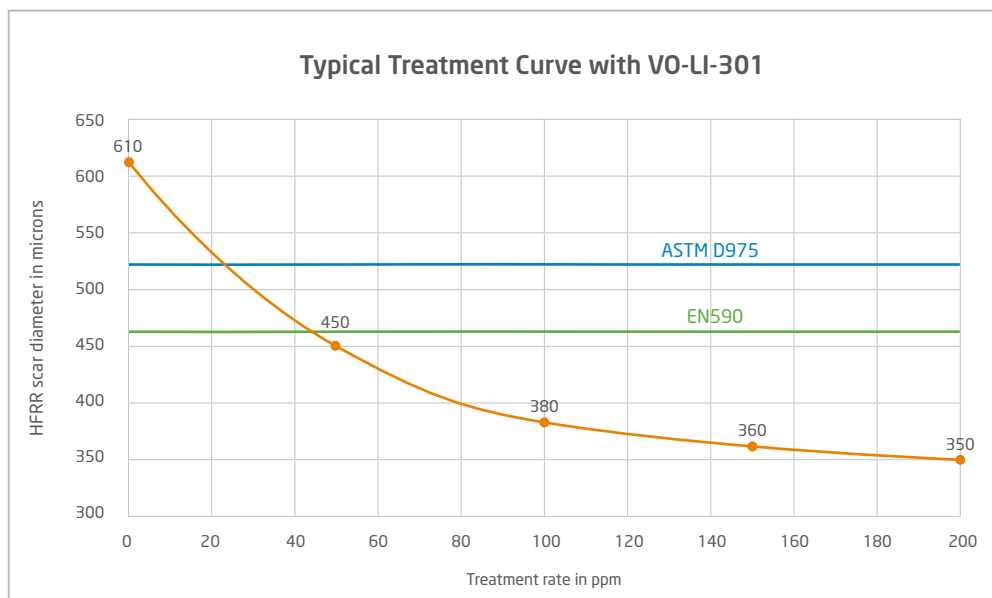

**VO-LI-301** recommended treatment rate may vary depending on the Diesel fuel nature and required lubricity target from 25 to 100 ppm.

## HANDLING AND STORAGE

Before handling, storage, or use, please refer to the Material Safety Data Sheet for detailed information.

The storage of **VO-LI-301** is optimum at 20 °C (68 °F).

Typical shelf life of **VO-LI-301** is 12 months when storage guidelines provided in the Material Safety Data Sheet are followed.